

VISCOUNT HYGIENE PLASTIC PALLET

1200mm x 1000mm



Lasts 3 times longer than wooden pallets
No fumigation
Environmental & sustainable
European design & manufacture



The Viscount Hygiene Plastic Pallet is suitable for racking, stacking and packing in the most extreme conditions where ultimate cleanliness is required. Its European high pressure injection moulded design and manufacture, ensures the perfect balance between mechanical performance and hygiene requirements.

Manufacture from food grade HDPE is only the beginning. Smooth surfaces on the top, underside and runners prevent accumulation of grime and other hygiene hazards. When thoroughly cleaned and dried – quick and easily done – it could be used in direct contact with food. Fully recyclable and robust with impact resisting rounded corners, the Viscount Hygiene Plastic Pallet is conveyor systems friendly and can be used on racking with a distributed load of 1250kg.



Auckland
8 Vestey Drive,
Mt Wellington
PO Box 22462, Otahuhu
Auckland, New Zealand
Tel: +64 9 276 8679
Fax: +64 9 276 4392


Wellington
Level 2, 46-50
Bloomfield Terrace
PO Box 30238, Lower Hutt,
Wellington, New Zealand
Tel: +64 4 570 3328
Fax: +64 4 570 3329

Christchurch
Cnr Brougham &
Gasson Streets
PO Box 7111,
Christchurch, New Zealand
Tel: +64 3 365 4382
Fax: +64 3 366 6026

VISCOUNT PLASTICS PALLET RANGE

www.viscountplastics.co.nz

TECHNICAL DRAWING

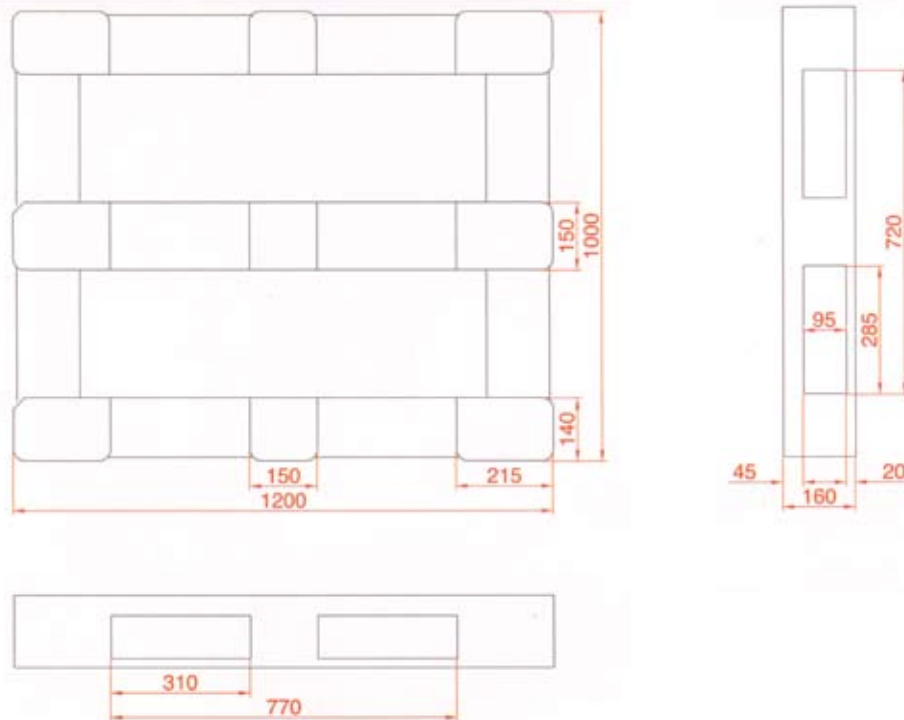

TECHNICAL DATA

Dimensions

Length	1200mm
Width	1000mm
Height	160mm
Window opening	95mm

* dimensions in accordance with ISO, AFNOR, DIN, CEN

Load capacity

Static	5000kg
Dynamic	1250kg
In rack**	1250kg

* loading capacities can vary according to the type of load

** homogeneously distributed load

Weight	23kg (+/- 0.2kg)
---------------	------------------

Temperature range

In use	-20°C up to +40°C
Cleaning	up to +100°C

Options (minimum quantities apply)

- Special colours available upon request
- Anti-slip pads
- Marking possible (name/logo/numbering)

Characteristics

- Standard colour: grey (other colours available - minimum quantities apply)
- Completely closed surface – no cavities
- Food-grade approved raw materials (HDPE)
- Biologically stable
- Easy to clean and dry

Other considerations

- Smooth surfaces on top, underside and runners - to prevent the accumulation of dirt and debris, making it easy to clean
- Robust construction - allows for the pallet to be used in racking with a distributed load of 1250kg and on automated conveyor systems
- Manufactured from Food Grade HDPE, for repeated direct contact with food. No risk of contamination if cleaned thoroughly between uses
- Can be cleaned at up to 100°C - to ensure that the pallet is thoroughly clean
- Smooth surfaces prevent water build up - making it easy to dry
- Retaining lips on the outside edges of pallet - prevent product movement on the deck of the pallet
- UV and weather resistant
- No metal reinforcements - making it fully recyclable
- No cavities or joins - to prevent the absorption of water or other liquids
- Compatible with all materials handling equipment, including jack trucks