


VISCOUNT PLASTICS

RECRATE RANGE

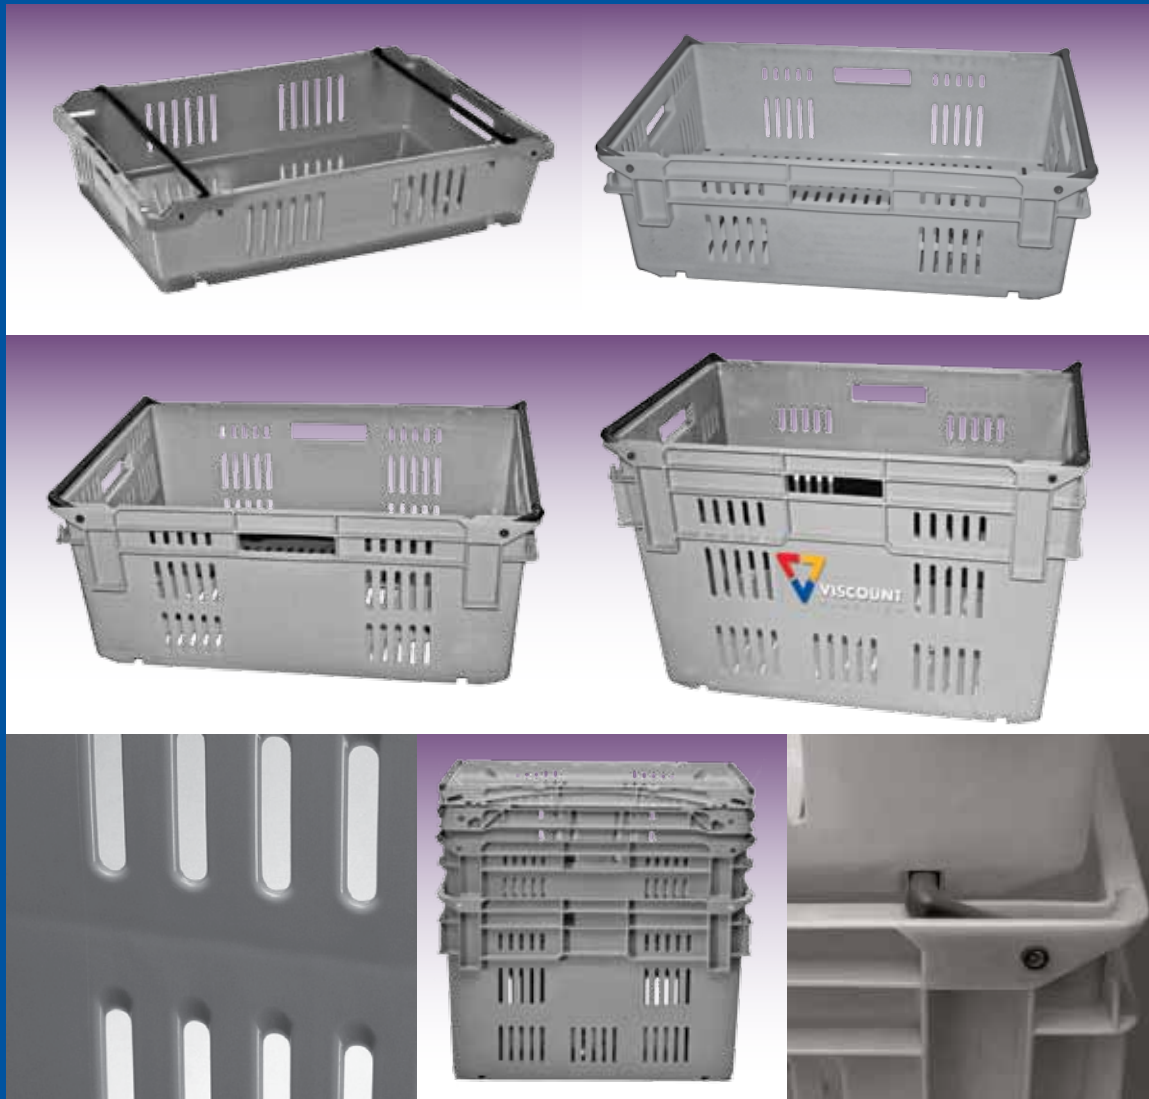

Viscount Recrates: 25L, 35L, 47L, 75L

Viscount Plastics Recrate range of crates are suitable for almost all transport requirements. Viscount have consulted with a variety of industries to find solutions that fit with process, cost and transport needs, and have custom moulded crates to suit.

The unit loads are indicative only, all sizes of crate carry up to 30kg, provided maximum load on the bottom crate does not exceed 180kg.

Please consult Viscount Plastics where weights, volumes and dimensions are critical, as those shown should be treated as indicative only. (Viscount Plastics reserves the right to make product alterations at its discretion).



Auckland
8 Vestey Drive,
Mt Wellington
PO Box 22462, Otahuhu
Auckland, New Zealand
Tel: +64 9 276 8679
Fax: +64 9 276 4392

Wellington
Level 2, 46-50
Bloomfield Terrace
PO Box 30238, Lower Hutt,
Wellington, New Zealand
Tel: +64 4 570 3328
Fax: +64 4 570 3329

Christchurch
Cnr Brougham &
Gasson Streets
PO Box 7111,
Christchurch, New Zealand
Tel: +64 3 365 4382
Fax: +64 3 366 6026

RECRATE RANGE

www.viscountplastics.co.nz



TECHNICAL SPECIFICATIONS

RECRATE RANGE

	Recrate 25L	Recrate 35L	Recrate 47L	Recrate 75L
External dimensions (mm)	600 x 400 x 140	600 x 400 x 193	600 x 400 x 247	600 x 400 x 394
Internal dimensions (mm)	549 x 348 x 118	549 x 348 x 161	549 x 348 x 221	549 x 348 x 368
Incremental nest height (mm)	62	97	118	150
Incremental stack height (mm)	134	182	240	388
Product weight (kg) (including stacking bars)	1.44	1.6	1.97	2.9
Unit load (kg)	12	15	18	22
Maximum load (kg)	180	180	180	180
Stack height (maximum recommended)	15	12	10	8
Capacity (litres)	25	35	47	75

Feature

Benefit


100% Plastic	No splinters, no rusting, more hygienic, easily cleaned, light weight
Nesting	Maximum freight efficiency for empty crates Tapered sides ensure easy de-nesting
Strapping Lugs	Allows simple and easy load stabilisation
600mm x 400mm Dimensions	Internationally recognised as maximising usable space on standard 1200mm x 1000mm or 1200 x 1200 pallets
Produce-caring ventilation pattern	Small size vent slots prevent produce damage, while the large number of vents allows maximum air flow through contents
Fully radiused edges	No sharp corners on the inside including vent slots or the outside to damage contents or crate handlers
Completely smooth interior	Makes the most of internal space with no protrusions to damage contents
Smooth underside of base	No sharp edges to damage contents in crate below
Stacking bar channels	Ensures a positive locking system when crates are stacked on top of one another
Permanent branding options	Either moulded in or hot stamped into the crate. Room for logo and message
Label holders	Easily seen user information or inventory labelling
Four handle holds	Provides maximum flexibility and comfort for handling crates
Colour options available	Allows for colour identification. Availability depends on quantities ordered
Food grade material	Polypropylene suitable for food contact use



25L Recrate



35L Recrate

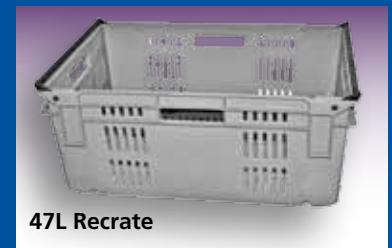

47L Recrate



75L Recrate

Note: Hot stamping available on this product



Innovative, versatile and customer focused

